

## 2 way Manifold



### TECHNICAL FEATURES :

- Working pressure: 6000 PSI
- Temperature rating : PTFE 450°F (232°C).
- Material of construction :SS 316.
- Stem packing :PTFE.

### BONNET ASSEMBLY:

- Screwed Bonnet design.
- Spindle tip -Non rotating vee tip shut off type
- Spindle-Rolled thread type
- Bonnet pusher - Duly machined for smooth stem cycle.
- Dust cap - Protects stem threads from external contamination.


### TESTING :

- Hydrostatic shell test is performed AT 1.5 TIMES the working pressure.
- Optional(helium/nitrogen) tests are available on request.

### CLEANING & PACKAGING:



- All components are ultrasonically cleaned prior to assembly & testing.

**NOTE:** Different End connections and Material grades offered on request.  
All valves are 100% factory tested.

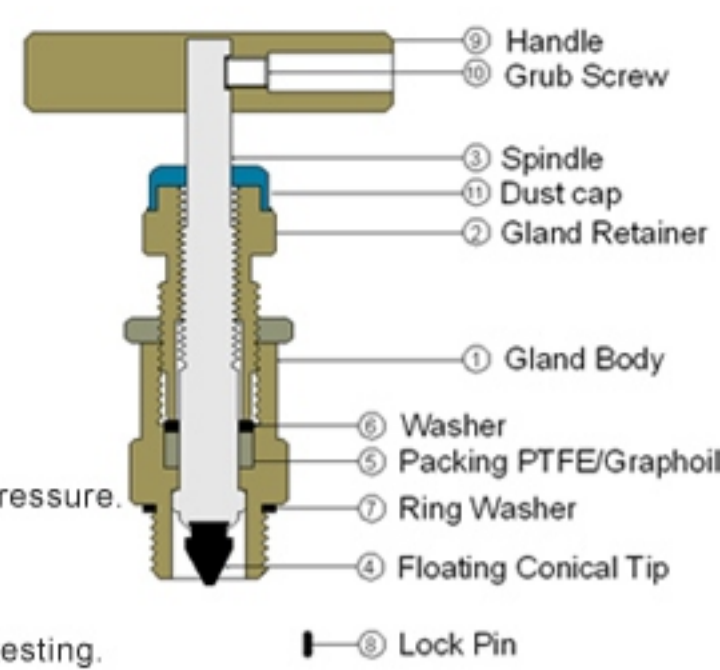


### TEST PRESSURES


|      | HYDRAULIC | PNEUMATIC (NITROGEN) |
|------|-----------|----------------------|
| BODY | 9000_PSI  | 1000_PSI             |
| SEAT | 6600_PSI  | 1000_PSI             |

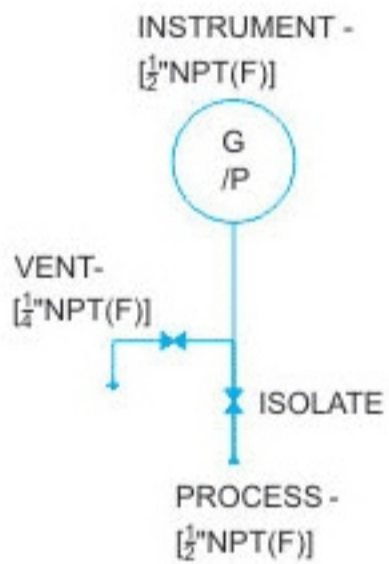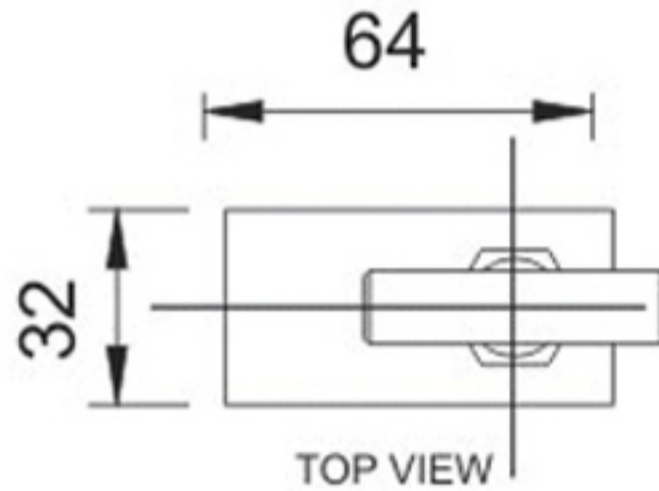

SIDE VIEW

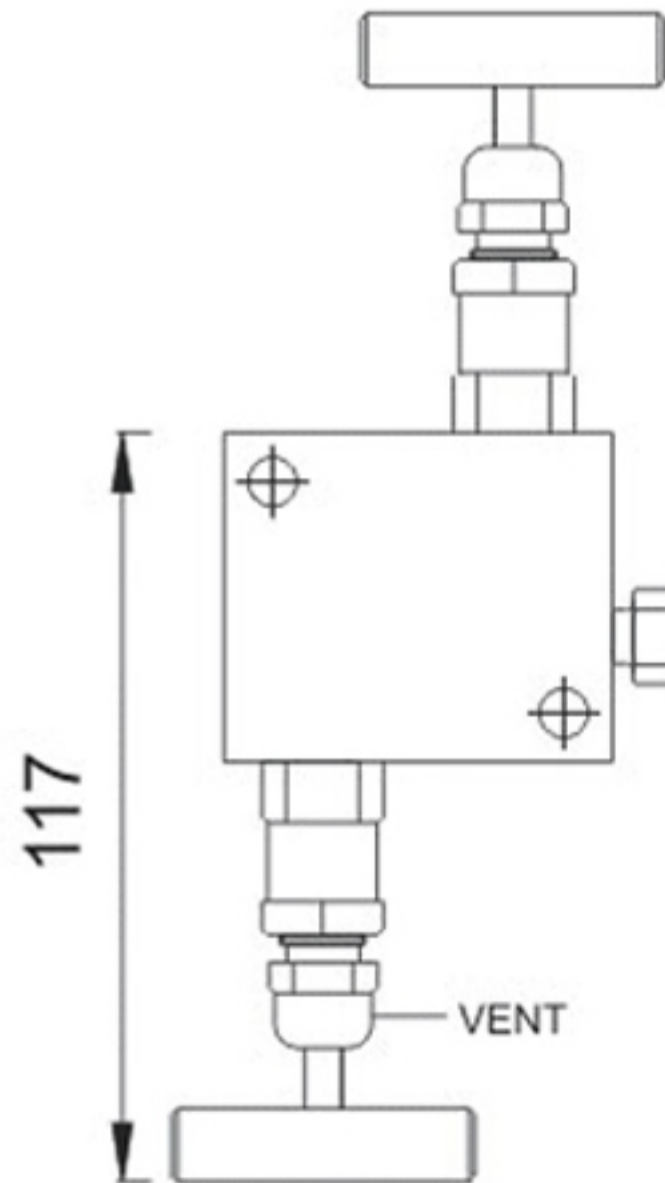


FRONT VIEW

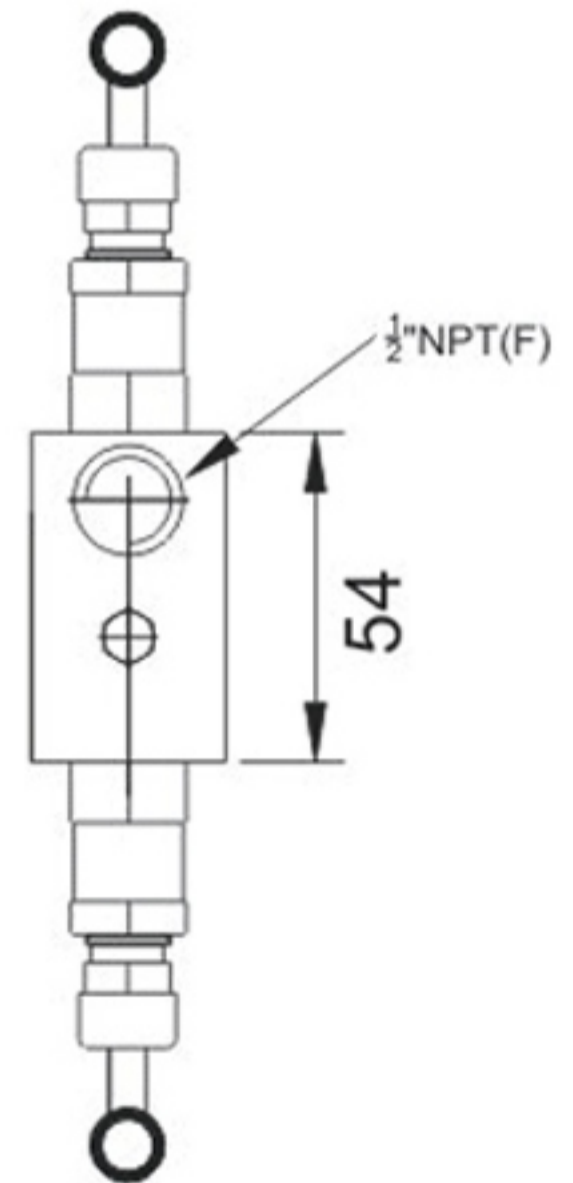

SIDE VIEW

**NOTE: ALL DIMENTIONS ARE IN MM. DIMENTIONS ARE FOR REFERENCE ONLY & SUBJECTED TO CHANGE**

|                     |              |                |                    |   |
|---------------------|--------------|----------------|--------------------|---|
| DRN.BY. <b>JAIM</b> | DATE :       | CLIENT :       | ITEM :             |  <b>PMT ENGINEERS</b><br>Naroda- Ahmedabad- 382330<br>E-Mail : info@pmtengineers.com<br>pmtpanchal@yahoo.co.in<br>Web : www.pmtengineers.com |
| CHD.BY.             | ISSUE NO.    | NAME :         | APPD.BY PART NO. : |   |
| APD.BY.             | ISSUE DATE : | DESIGNATION :  | QTY : _____ NOS.   |   |
|                     |              | SIGN & STAMP : | MATERIAL :         |   |